



NEROLAC IMPRESSIONS 24 CARAT PREMIUM LUXURY EMULSION



**KANSAI
NEROLAC**
PAINTS LIMITED

Nerolac House, Ganpatrao Kadam Marg, Lower Parel, Mumbai 40001

PRODUCT DESCRIPTION

Nerolac Impressions 24 Carat Premium Emulsion is a premium quality Architectural coating specially formulated by using pure acrylic latest and high micronised pigments so as to impart smooth velvet finish with excellent washability

PERFORMANCE FEATURES & BENEFITS

- Smooth velvet finish with Sheen.
- Excellent Flow & Brushability.
- Excellent Washability & Stain Resistance.
- Very good Antifungal Resistance.
- Ease of application.
- Low odour.

RECOMMENDED USAGE


Nerolac Impression 24 Carat Premium Luxury Emulsion can be applied on the interior surfaces, on new and previously painted surfaces such as plaster, brickwork, cement rendering, concrete, hardboard building boards etc.

SURFACE PREPARATION


Ensure the surface is clean, dry free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down using suitable abrasive paper and thereafter wipe off. Treat fungus affected area using Nerolac Fungicidal Solution. Allow it to react for 6 - 8 hrs. Apply a coat of suitable Primer* followed by Allscapes /Nerolac wall Putty to level the dents and make the surface uniform. Apply again a coat of suitable Primer*. Then apply two to three coats of Nerolac Impressions 24 Carat Premium Luxury Emulsion.

RECOMMENDED SYSTEM FOR APPLICATION

For New Masonry Surfaces

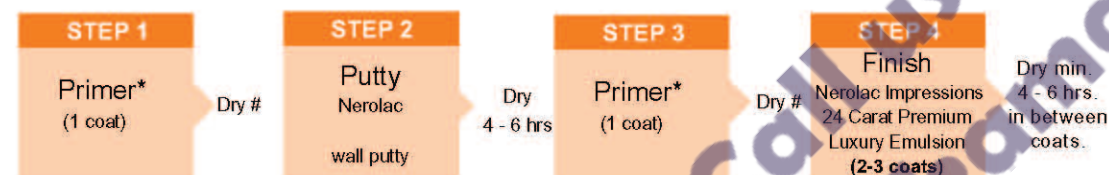

For Repainting on Smooth Lime / Distemper / Emulsion / Enamel Masonry Surfaces

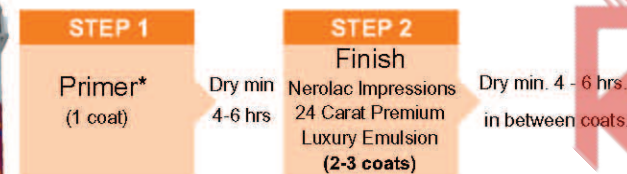

Sand the Surface with Emery Paper and Wipe clean before application of subsequent coat
*Nerolac Cement Primer (Water Thinnable/Solvent Thinnable) or Goody Universal Primer (Solvent Thinnable) or Goody Water Thinnable Cement Primer
Minimum 8 Hrs for Solvent Thinnable Primer & Minimum 4 - 6 Hrs for Water Thinnable Primer



TECHNICAL DATA

Coverage**	220 - 240 sq. ft/ltr/coat. When applied smooth and non-absorbent surface.
Drying Time	Surface Dry: 30 minutes.
@27° ± 2°C & RH 60 ± 5%	Recoating: 4 - 6 hrs.
Gloss Levels/ Sheen levels	Sheen.
Thinning	50% by volume using water
Flash Point	NA.
Stability of Thinned Paint	Use within 24 hrs.

**Actual coverage may vary depending on Method, Condition of Application, Surface Porosity & Shade

PRECAUTIONS

- 1) Refer MSDS for "Nerolac Impressions 24 Carat Premium Luxury Emulsion" for safety measures & precautions.
- 2) Store in well ambient conditions, ventilated locations & away from the source of ignition and fire.
- 3) Keep away from children.
- 4) In case of eye/skin contact, wash with plenty of water.
- 5) Inhalation / Injection will cause danger. In either case, move to fresh air & consult medical practitioners in both the cases.
- 6) Do not apply when ambient temperature might drop to level below 10°C within 4 hrs of application.
- 7) New plaster should be allowed to cure for minimum 12 weeks.
- 8) Avoid extra thinning for better results.
- 9) Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
- 10) The container must be tightly closed when not in use. Stir well and strain before use.
- 11) Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

Surfaces painted with Impressions 24 Carat are washable by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.

SAFETY FEATURES

Non-Flammable.

PACK SIZES

1 ltr, 4 ltrs., 10 ltrs. & 20 ltrs.

SHADE RANGE

As per Color Scapes Fandek & Impressions 24 Carat Premium Luxury Emulsion Shade Card.

For hassle free painting dial 1800 2092092.

For hassle free painting dial 1800 2092092.

* Paint with estimated VOCs in the range of 5 grams/litre without addition of colorant (Ref - KNPL Lab Results). VOC Content may vary from batch to batch.