


NEROLAC IMPRESSIONS ECO CLEAN ULTRA LUXURY EMULSION



KANSAI NEROLAC PAINTS LIMITED

Nerolac House, Ganpatrao Kadam Marg, Lower Parel, Mumbai 400013.

PRODUCT DESCRIPTION

Nerolac Impressions ECO CLEAN Ultra Luxury Emulsion is an water based interior wall emulsion with a rich, smooth finish, No VOC and odour less. It has excellent washability and stain resistance properties.

PERFORMANCE FEATURES & BENEFITS

- Low Odour
- No VOC
- Excellent Washability & Stain resistance
- Good Flexibility
- Excellent Fungal Resistance
- Good Coverage

RECOMMENDED USAGE


Nerolac Impression ECO CLEAN Ultra Luxury Emulsion is designed for application on the interior, new and previously painted surfaces such as plaster, brickwork, cement rendering, concrete, hardboards etc..

SURFACE PREPARATION


Ensure the surface is clean, dry free from all defective or poorly adhering material, dirt, grease, wax etc. by rubbing down using suitable abrasive paper and thereafter wiping off the surface. Treat fungus affected area using Nerolac Fungicidal Solution. Allow it to react for 6 - 8 hrs. Apply a coat of suitable Primer* followed by Nerolac wall Putty/Nerolac Cement Putty to level the dents and make the surface. Smooth and uniform by sanding with emery paper 180 & Wipe Clean. Apply a coat of suitable Primer* on puttied areas .. Sand with emery paper 320 & wipe clean. Then apply two to three coats of Impressions ECO Clean Emulsion as per recommended

RECOMMENDED SYSTEM FOR APPLICATION

For New Masonry Surfaces

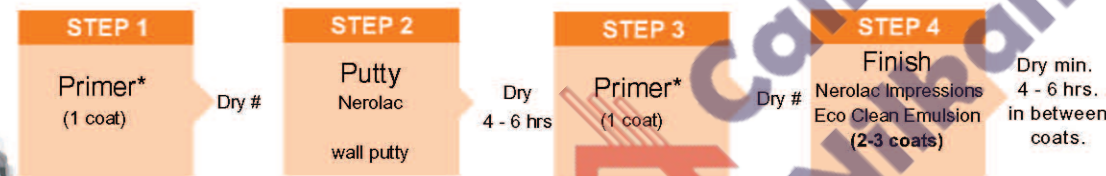

For Repainting on Smooth Lime / Distemper / Emulsion / Enamel Masonry Surfaces

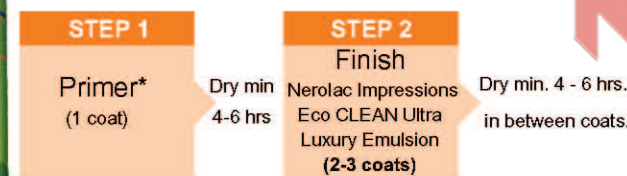

Sand the Surface with Emery Paper and Wipe clean before application of subsequent coat



TECHNICAL DATA

Coverage**	On Smooth and non-absorbent surface. 220 - 240 sq. ft/ltr/coat.
Drying Time	Surface Dry: 30 minutes.
@27° ± 2°C & RH 60 ± 5%	Recoating: 4 - 6 hrs.
Gloss Levels/ Sheen levels	Sheen.
Thinning	45 - 50% by volume using water
Flash Point	NA.
Stability of Thinned Paint	Use within 24 hrs.
Shelf- Life	1 year from the date of manufacture in original tightly closed containers away from direct

** Actual coverage may vary depending on Method, Condition of Application, Surface Porosity & Shade

PRECAUTIONS

- 1) Refer MSDS for "Nerolac Impressions ECO CLEAN Ultra Luxury Emulsion" for safety measures & precautions
- 2) Store in well ambient conditions, ventilated locations & away from the source of ignition and fire.
- 3) Keep away from children.
- 4) In case of eye/skin contact, wash with plenty of water.
- 5) Inhalation / Injection will cause danger. In either case, move to fresh air & consult medical practitioners in both the cases.
- 6) Do not apply when ambient temperature might drop to level below 10°C within 4 hrs of application.
- 7) New plaster should be allowed to cure for minimum 12 weeks.
- 8) Avoid extra thinning for better results.
- 9) Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Stainer. Stir well tinted paint after tinting & before application.
- 10) The container must be tightly closed when not in use. Stir well and strain before use.
- 11) Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

For removing stains sponge clean with a mild soap solution and wipe clean. Ensure a drying time of 1 week before cleaning.

SAFETY FEATURES

Non-Flammable.

PACK SIZES

1 ltr, 4 ltrs., 10 ltrs. & 20 ltrs.

SHADE RANGE

As per Color Scapes Fandek & Shade Card.

For hassle free painting dial 1800 2092092.

For hassle free painting dial 1800 2092092.

* Paint with estimated VOCs in the range of 5 grams/litre without addition of colorant (Ref - KNPL Lab Results). VOC Content may vary from batch to batch.