



NEROLAC IMPRESSIONS METALLIC FINISH WALL EMULSION (DESIGNER SERIES)



**KANSAI
NEROLAC**
PAINTS LIMITED

Nerolac House, Ganpatrao Kadam Marg, Lower Parel, Mumbai 400013.

PRODUCT DESCRIPTION

Nerolac Impressions Metallic Finish Wall Emulsion is a premium quality special effect designer series range that creates a variety of special effects and textures on interior walls and is based on pure acrylic emulsion.

PERFORMANCE FEATURES & BENEFITS

- Smooth Metallic finish with Sheen.
- Excellent Washability & Stain resistance
- Very good Antifungal Resistance.
- Ease of application.
- Low odour.
- Good aesthetic look.
- Can make various designs with different application tools.

RECOMMENDED USAGE

Nerolac Impressions Metallic Finish Wall Emulsion can be applied on the interior surfaces, on new previously painted surfaces such as plaster, brickwork, cement rendering, concrete, hardboard, building boards, etc.

SURFACE PREPARATION


Ensure the surface is clean, dry free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down using suitable abrasive paper and thereafter wipe off. Treat fungus affected area using Nerolac Fungicidal Solution. Allow to react for 6 – 8 hrs. Apply a coat of suitable Primer* followed by Allscapes/Nerolac Wall Putty to level the dents and make the surface uniform. Apply again a coat of suitable Primer*. Apply 2-3 coats of Nerolac Impression 24 Carat Premium Luxury Emulsion as Base coat to get the desired finish. Finally apply Nerolac Impressions Metallic Finish Wall Emulsion as per the final design required.

RECOMMENDED SYSTEM

For New Masonry Surfaces



For Repainting on Smooth Lime / Distemper / Emulsion / Enamel Masonary Surfaces

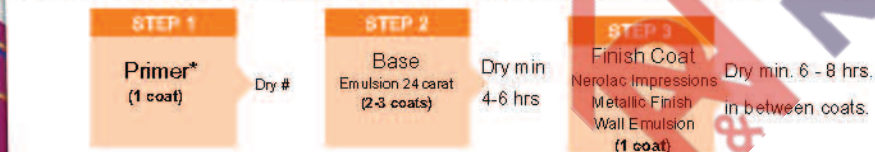

Sand the Surface with Emery Paper and Wipe clean before application of subsequent coats.

*Nerolac Cement Primer (Water Thinnable/Solvent Thinnable) or Goody Universal Primer (Solvent Thinnable) or Goody Water Thinnable Cement Primer

Minimum 8 Hrs for Solvent Thinnable Primer & Minimum 4-6 Hrs for Water Thinnable Primer



TECHNICAL DATA

Coverage**	60 - 80 sq. ft/ltr/coat. When applied smooth and non-absorbent surface.
Drying Time	Surface Dry : 60 - 90 minutes
@27° ± 2°C & RH 60 ± 5%	Recoating: 4 - 6 hrs.
Gloss Levels/ Sheen levels	Sheen
Thinning	Max 5% by volume using water
Flash Point	NA.
Stability of Thinned Paint	Use within 24 hrs.

**Actual coverage may vary depending on Method, Condition of Application, Surface Porosity, Design selected & Shade

PRECAUTIONS

- 1) Refer MSDS for "Nerolac Impressions Metallic Finish Wall Emulsion" for safety measures & Precautions.
- 2) Store in well ambient conditions, Ventilated locations & away from the source of ignition and fire.
- 3) Keep away from children.
- 4) In case of eye/skin contact wash with plenty of water.
- 5) Inhalation / Injection will cause danger. In case move to fresh air & consult medical practitioners in both the cases.
- 6) Do not apply when ambient temperature might drop to level below 10°C within 4 - 5 hrs of application.
- 7) New plaster should be allowed to cure for minimum 12 weeks.
- 8) Avoid extra thinning for better results.
- 9) Can be tinted with "Nerolac Hi-Power Stainer" before thinning. Do not add more than 5% of "Nerolac Hi-Power Universal Stainer". Stir the tinted paint well, after tinting & before application.
- 10) The container must be tightly closed when not in use. Stir well before use.
- 11) Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

Surfaces painted with Impressions Metallic Finish are washable by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.

SAFETY FEATURES

Non-Flammable.

PACK SIZES

500 ml & 1 ltr, 4 ltrs.

SHADE RANGE

As per Nerolac Impressions Metallic Finish Wall Emulsion Shade Card.